

Tapboxes UK Ltd STANDPIPE DATA SHEET




Free standing insulated Standpipe with above ground or below ground fixing options,

SPECIFICATION


Material	Standpipe body Galvanised sheet steel. Tap box plastic coated zinc plated steel. avail. Black, White, Brown or galvanised finish.
Height	840 above ground With below ground option additional 600mm section below ground level.
Width	140mm (300 overall inc. tap box)
Depth	110mm (265mm overall inc. tap box.)
Insulation	Standpipe body has 12mm insulation + all internal pipework insulated with 19mm Climaflex or equivalent. Thermal performance 0.033W/mK. Water repellent 100% Complies with BS5422 insulation requirement
Internal Fittings	All internal fittings WRAS approved 1 x 1/2" Hose Union Brass Bib Tap 1 x BS6282 Double check valve 1 x Drain off Valve 1 x Stop tap 1 x 20mm Water Connector 15mm Barrier pipe with superset inserts
Hose Fittings	1 x 260 long 1/2" hose 1 x 1/2" Hose connector
Security	Lockable Latch on tap box, takes own padlock. (fitted with a cam lock as an option) Cam lock & 2 keys on front access panel to internal plumbing.

(Please note: The stop tap and double check valve can be reversed depending on your Utility company. Also available are non-conclusive taps and 25mm MDPE couplers.



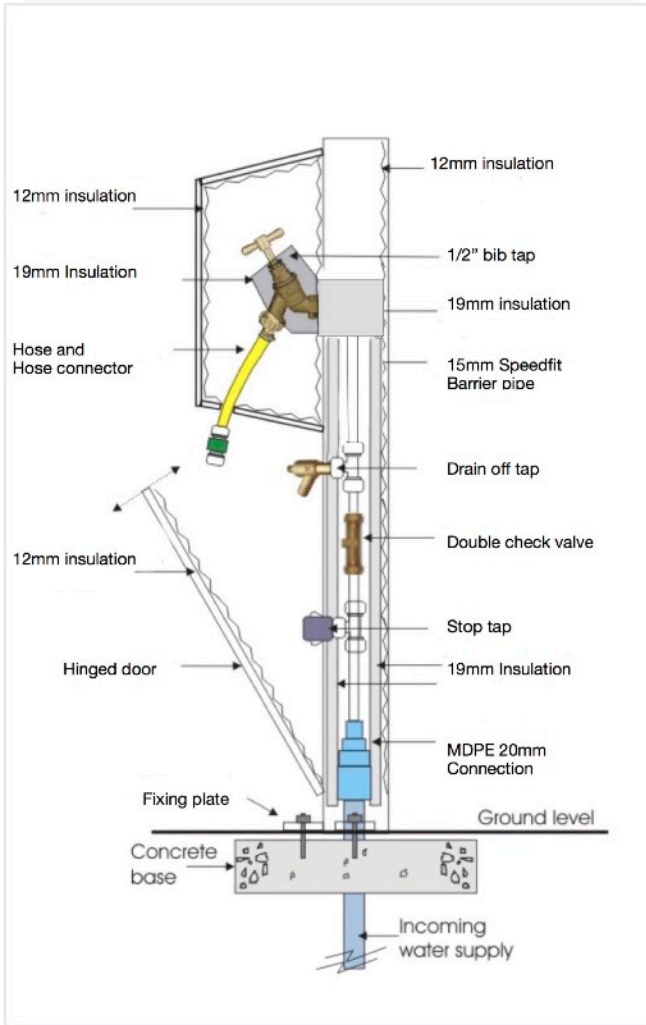

Above Ground

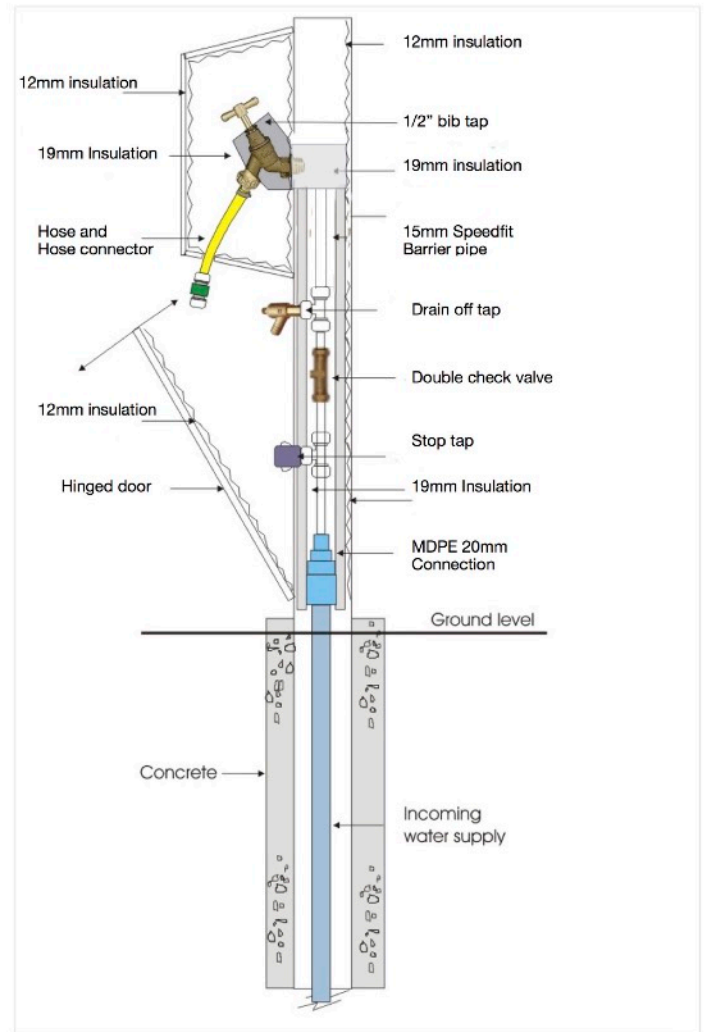

Below Ground

Tapboxes UK Ltd, 2 Moss Cottage., Mossfields, Kidsgrove, Stoke on Trent. ST7 1EL
 Tel. 01782 786821. email. sales@tapboxes.co.uk. www.tapboxes.co.uk
 Company No. 10465645. Vat no. 217089603. Registered in England & Wales.